


## Two wire float connections

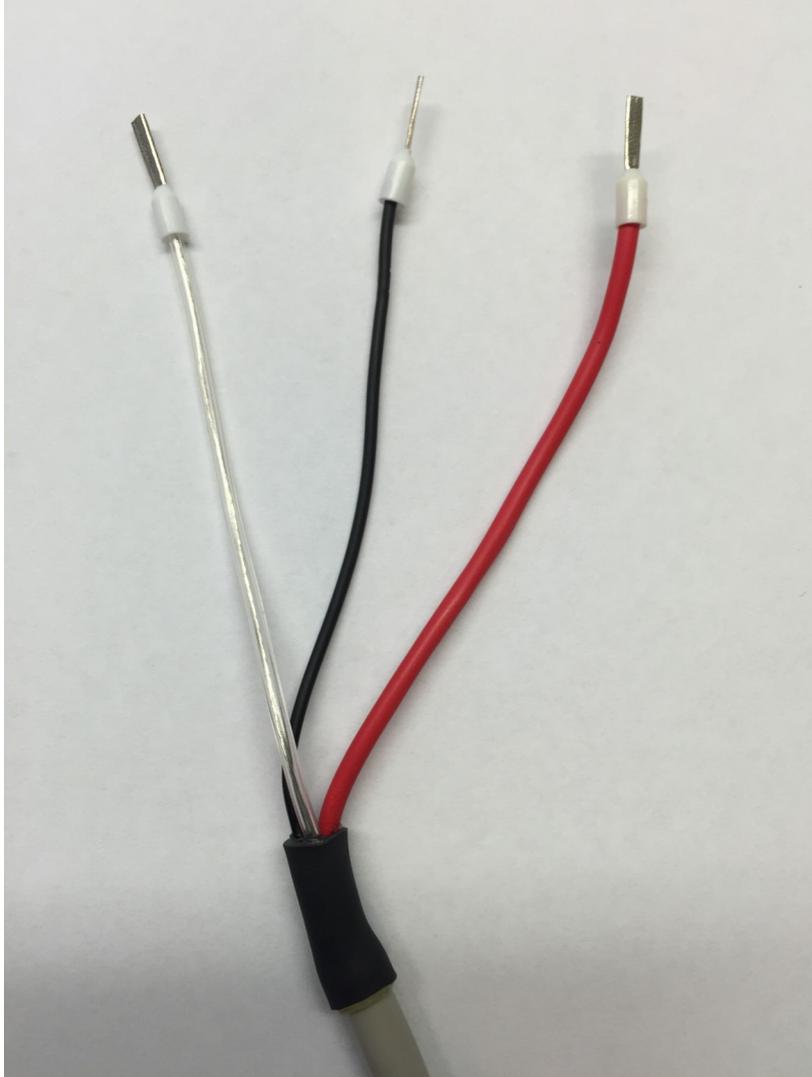

- ◆ The clear or, in some cases, green/yellow wire is the screen and should be connected to ground
- ◆ There is a switch between the red and black wire which opens when the float is at the bottom of the tube. This switch can also be ordered as a Normally Open type in which case it will close when the switch is at the bottom. See the float probe packaging label for information on what type of switch is fitted.